

CUT-TO-LENGTH (CTL) PROGRAM



High-Performance Standard Chain Tailored to Your Application

Diamond-Drives by Timken has enhanced its Cut-to-Length (CTL) program to better serve you. Now, you can streamline your operations by ordering standard chain sizes precisely cut to your required lengths.

CTL Chain Shipped in 1-2 Days*


Stay on schedule with reliable service and timely delivery of cut-to-length standard chains, manufactured to exacting dimensional standards for industry-leading performance.

*Lead time subject to change

Choose from the following product offerings:

- ◆ Diamond® ASME/ANSI Standard Offerings:
 - ◆ Standard Series, High Strength Series, and Double-Pitch Series
 - ◆ Single and Double-Strand, Riveted
 - ◆ Select Sizes Available Cottered
- ◆ Diamond® ISO/British Standard Offerings:
 - ◆ Standard Series, Riveted
- ◆ Constructed With Carbon Steel
- ◆ Customized to Even and Odd Lengths
- ◆ Even Lengths: Includes a Connecting Link
- ◆ Odd Lengths: Includes a Connecting Link and Offset Link

NOMENCLATURE

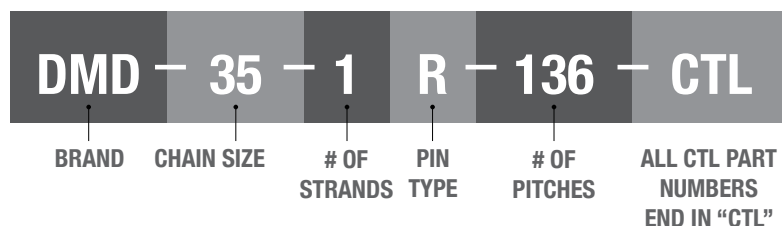

Offered in Select Sizes					
ANSI Standard	Chain Size				
	Riveted	35-1R	35-2R	40-1R	40-2R
		41-1R	50-1R	50-2R	60-1R
		60-2R	60H-1R	80-1R	80-2R
		80H-1R	100-1R	100-2R	100H-1R
	Cottered	120-1R	120H-1R	140-1R	140H-1R
		80-1C	80H-1C	100-1C	100H-1C
	High Strength	120-1C	120H-1C	140-1C	
		60HS-1R	80HS-1R	100HS-1R	120HS-1R
	Double Pitch	140HS-1R			
A2040-1R		C2040-1R	A2050-1R	C2050-1R	
British Standard	Riveted	C2060H-1R	C2080H-1R		
		06B-1R	08B-1R	10B-1R	12B-1R
		16B-1R	20B-1R	24B-1R	28B-1R

Pitches-to-Feet Cheat Sheet			
ANSI Standard	Chain Size	Pitch (Inch)	Pitches Per Foot
	35	3/8	32
	40	1/2	24
	41	1/2	24
	50	5/8	19.2
	60	3/4	16
	80	1	12
	100	1 1/4	9.6
	120	1 1/2	8
	140	1 3/4	6.9
	2040	1	12
	2050	1 1/4	9.6
	2060	1 1/2	8
	2080	2	6
British Standard	06B	3/8	32
	08B	1/2	24
	10B	5/8	19.2
	12B	3/4	16
	16B	1	12
	20B	1 1/4	9.6
	24B	1 1/2	8
	28B	1 3/4	6.9