




Diamond Non-Standard series chains were designed prior to the adoption of the ASME / ANSI standards.

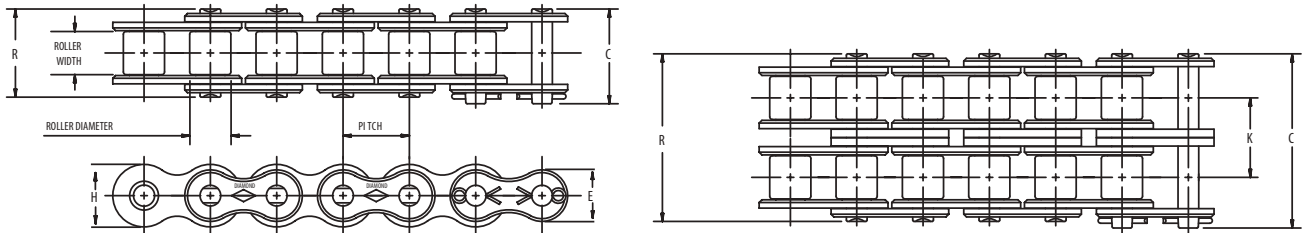

Dimensions in Inches

ASME/ANSI Number	Pitch Inches	Roller Width	Roller Diameter	Pin Diameter	Link Plate Thickness	C	R	K	Pounds Per Foot	Average Tensile Strength
867	1/2	5/16	.335	.174	.060	.730	.68043	4200
148 X 1/4	5/8	1/4	.400	.200	.080	.730	.67059	6600
148 X 5/16	5/8	5/16	.400	.200	.080	.860	.74064	6600
433 X 3/8	3/4	3/8	.469	.234	.094	.980	.91091	8500
435 X 3/8	1	3/8	.562	.281	.125	1.14	1.05	1.11	9000
435 X 1/2	1	1/2	.562	.281	.125	1.27	1.18	1.21	9000
472	1 1/2	3/4	.875	.437	.187	1.86	1.72	3.40	34000
472-2	1 1/2	3/4	.875	.437	.187	3.45	3.30	1.55	6.76	68000
472-3	1 1/2	3/4	.875	.437	.187	5.00	4.85	1.55	10.08	102000
472-4	1 1/2	3/4	.875	.437	.187	6.55	6.41	1.55	13.40	136000
264	2 1/2	1 1/2	1.562	.875	.375	3.71	3.39	13.68	148500
264-3	2 1/2	1 1/2	1.562	.875	.375	9.88	9.56	3.083	40.92	445500

