




DIAMOND PIN OVEN CHAIN

Diamond pin oven chains are built with Diamond ASME/ANSI 60 pitch chain and are available with bendable, breakaway, or stainless steel carrier pins. Diamond pin oven chains are designed with carrier pins that are the actual chain pins, not an attachment, to improve the strength and integrity of the chain, and increase the overall life span of the chain.

- **Bendable Pins:** Through-hardened medium carbon extended carrier pins are manufactured to produce a tough, ductile pin that is capable of withstanding incidental contact from jams or interference with machine framework. These pins are designed to be easily hand straightened back to their original position.
- **Breakaway Pins:** Case-hardened, low carbon extended carrier pins are manufactured to break off from incidental contact with jammed product, the machine frame, or other obstacles due to misalignment.

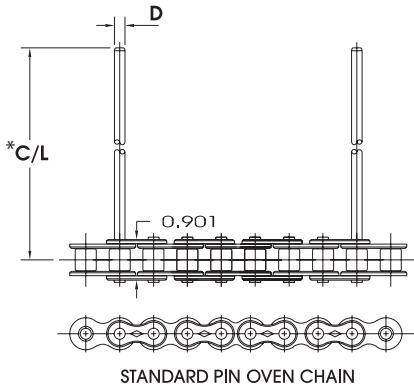

Dimensions in Inches



ASME/ANSI Number	Pitch Inches	Roller Width	Roller Diameter	Pin Diameter	Link Plate Thickness	C	R	Pounds Per Foot	Average Tensile Strength
60	3/4	1/2	.469	.234	.094	1.11	1.04	.990	8500

*C/L dimension will depend upon tip and pin extension selected.

PIN OVEN CHAIN

DIAMOND RING LEADER® O-RING PIN OVEN CHAIN

Diamond RING LEADER pin oven chains are built with Diamond Chain's O-Ring technology to seal lubricant in and keep contaminants out at operating temperatures up to 450° F. RING LEADER pin oven chain can be manufactured with bendable, breakaway, or stainless steel carrier pins.

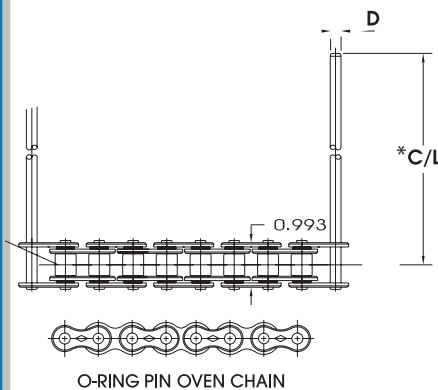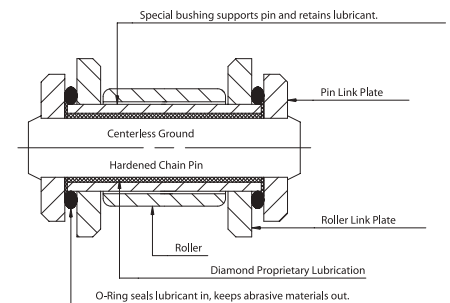

Dimensions in Inches

Model Number	Pitch Inches	Roller Width	Roller Diameter	Pin Diameter	Link Plate Thickness	C	R	Pounds Per Foot	Average Tensile Strength
50XL0	5/8	3/8	.400	.200	.095	0.950	.89	.72	6500
60XL03	3/4	1/2	.469	.234	.094	1.17	1.13	1.01	7700

*C/L dimension will depend upon tip and pin extension selected.




NOTHING OUTLASTS A DIAMOND.®



DIAMOND PIN OVEN CHAIN TIP ASSORTMENT

Diamond Chain produces over fifty different tips and pin extensions for pin oven chain use. These tips are available in many materials including steel, aluminum, heat stabilized nylon, and Diamond Chain's proprietary high temperature PEEK™ which is designed to withstand higher temperatures without drying, cracking, or wearing out. The following are the most common tips, additional tip and pin extension information can be found by contacting the Diamond Chain Company at 1-800-872-4246 or at www.diamondchain.com.

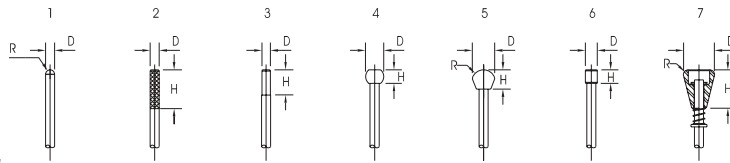

Dimensions in Inches


	1	2	3	4	5	6	7
D	.234	.247	.215	.468	.575	.352	.875
H	N/A	1.000	.650	.350	.472	.350	1.000
R	.117	N/A	N/A	N/A	.300	N/A	45 deg.

8
.820
1.000
.125

Tips 1-7 are made to order. Tip 8 is in stock.

DIAMOND PIN REPLACEMENT

Diamond pin oven chains are designed without the swaged pin heading so that if a link should need to be repaired, it can be done quickly and easily without grinding pins. Start by removing the air pressure in the tension device and clamp the chain in place. Use a pin extractor to remove the pin link and replace with a repair link. The chain is then ready to resume production.

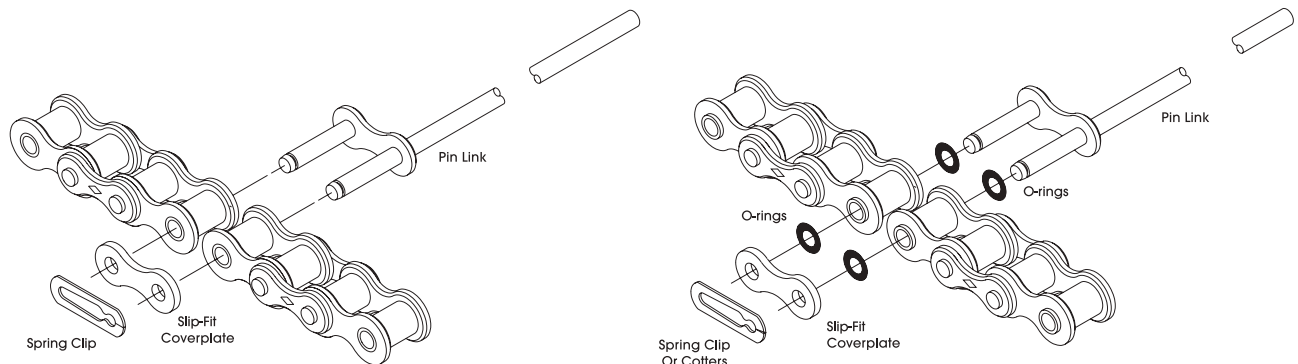

ORDERING INSTRUCTIONS

Ordering Instructions: Use the above drawing showing available tips and specify whether Standard or RING LEADER base chain is desired, type of pin material (bendable, breakable, or stainless), type of tip configuration, and the extension from the **centerline** of the chain to the end of the pin including the tip.

*PEEK is a trademark of Amoco Performance Products, Inc.

PIN OVEN - CHAIN DESCRIPTIONS AND DIMENSIONS

For more information on the Diamond Chain Company, its products, and its services, please visit us at www.diamondchain.com or by calling 1-877-484-6536.