




COUPLING CHAIN

These chains are specifically designed to work in concert with drive couplings to provide near-seamless power transmission. The chain's file-hard components develop a high-capacity unit durable enough to deliver long after other chains fail.

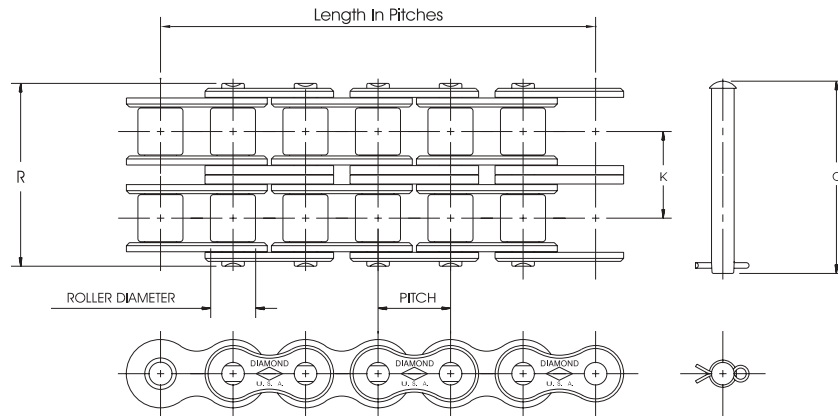

Dimensions in Inches

Model Number	Pitch Inches	Roller Width	Roller Diameter	C	R	K	Length in Pitches	Weight Per Foot
D4012	1/2	0.312	0.312	1.297	1.24	0.566	12	0.41
D4016	1/2	0.312	0.312	1.297	1.24	0.566	16	0.55
D5016	5/8	0.375	0.400	1.592	1.55	0.713	16	1.12
D5018	5/8	0.375	0.400	1.592	1.55	0.713	18	1.26
D6018	3/4	0.500	0.469	1.980	1.94	0.897	18	2.16
D6020	3/4	0.500	0.469	1.980	1.94	0.897	20	2.40
D6022	3/4	0.500	0.469	1.980	1.94	0.897	22	2.64
D8018	1	0.625	0.625	2.567	2.47	1.153	18	5.00
D8020	1	0.625	0.625	2.567	2.47	1.153	20	5.56
D10018	1 1/4	0.750	0.750	3.162	3.02	1.408	18	9.24
D10020	1 1/4	0.750	0.750	3.162	3.02	1.408	20	10.30
D12018	1 1/2	1.000	0.875	3.977	3.79	1.789	18	16.20
D12022	1 1/2	1.000	0.875	3.977	3.79	1.789	22	19.80

