

CUT-TO-LENGTH (CTL) PROGRAM

High-Performance Standard Chain Tailored to Your Application

Diamond-Drives by Timken has enhanced its Cut-to-Length (CTL) program to better serve you. Now, you can streamline your operations by ordering standard chain sizes precisely cut to your required lengths.


CTL Chain Delivered in 6-10 Days

Stay on schedule with reliable service and timely delivery of cut-to-length standard chains, manufactured to exacting dimensional standards for industry-leading performance.

Choose from the following product offerings:

- ◆ Diamond® ASME/ANSI Standard Series Chain and Double-Pitch Chain
- ◆ Constructed With Carbon Steel
- ◆ Single and Double-Strand, Riveted
 - ◆ Select Sizes Available Cottered
- ◆ Customized to Even and Odd Lengths
 - ◆ Even Lengths: Includes a Connecting Link
 - ◆ Odd Lengths: Includes a Connecting Link and Offset Link

NOMENCLATURE

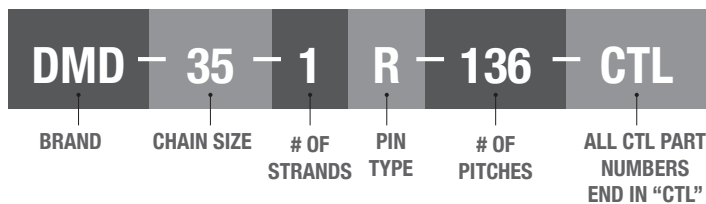

Offered in Select Sizes*	
Chain Size	
Single Strand	
Riveted	35-1R, 40-1R, 41-1R, 50-1R, 60-1R, 60H-1R, 80-1R, 80H-1R, 100-1R, 100H-1R, 120-1R, 140-1R
Double Strand, Riveted	35-2R, 40-2R, 50-2R, 60-2R, 80-2R
High Strength, Riveted	60HS-1R, 80HS-1R, 100HS-1R, 140HS-1R
Double Pitch, Riveted	C2040-1R, C2050-1R, C2060H-1R

*Additional sizes will be offered to the cut-to-length program in the future

Pitches-to-Feet Cheat Sheet		
Chain Size	Pitch (Inch)	Pitches Per Foot
35	3/8	32
40	1/2	24
41	1/2	24
50	5/8	19.2
60	3/4	16
80	1	12
100	1 1/4	9.6
120	1 1/2	8
140	1 3/4	6.9
2040	1	12
2050	1 1/4	9.6
2060	1 1/2	8