

CUT-TO-LENGTH (CTL) PROGRAM

HIGH-PERFORMANCE STANDARD CHAIN TAILORED TO YOUR APPLICATION

Diamond-Drives by Timken has enhanced its Cut-to-Length (CTL) program to better serve you. Now, you can streamline your operations by ordering standard chain sizes precisely cut to your required lengths.


CTL CHAIN DELIVERED IN 6-10 DAYS

Stay on schedule with reliable service and timely delivery of cut-to-length standard chains, manufactured to exacting dimensional standards for industry-leading performance.

CHOOSE FROM THE FOLLOWING PRODUCT OFFERINGS:

- Drives® ASME/ANSI Standard Series Chain and Double-Pitch Chain
- Constructed With Carbon Steel
- Single and Double-Strand, Riveted
 - Select Sizes Available Cottered
- Customized to Even and Odd Lengths
 - Even Lengths: Includes a Connecting Link
 - Odd Lengths: Includes a Connecting Link and Offset Link

NOMENCLATURE

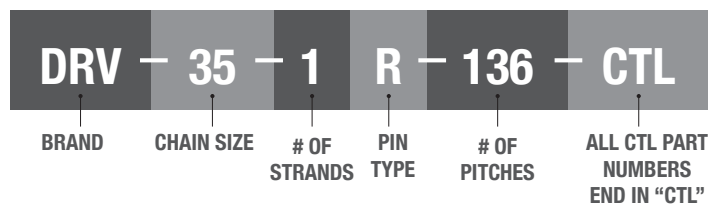

Offered in Select Sizes*	
Chain Size	
Single Strand	
Riveted	35-1R, 40-1R, 41-1R, 50-1R, 60-1R, 60H-1R, 80-1R, 80H-1R, 100-1R, 100H-1R, 120-1R, 120H-1R
Cottered	80-1C, 80HZ-1C, 100-1C, 100HZ-1C, 120-1C, 120HZ-1C
Double Strand, Riveted	35-2R, 40-2R, 50-2R, 60-2R, 80-2R
High Strength, Riveted	60HZ-1R, 80HZ-1R, 100HZ-1R, 120HZ-1R
Double Pitch, Riveted	A2040-1R, C2040-1R, A2050-1R, C2050-1R, C2060H-1R
*Additional sizes will be offered to the cut-to-length program in the future	

Pitches-to-Feet Cheat Sheet		
Chain Size	Pitch (Inch)	Pitches Per Foot
35	3/8	32
40	1/2	24
41	1/2	24
50	5/8	19.2
60	3/4	16
80	1	12
100	1 1/4	9.6
120	1 1/2	8
2040	1	12
2050	1 1/4	9.6
2060	1 1/2	8